

Single P-Channel MOSFET

■ DESCRIPTION

SMC3407G is the P-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced trench technology devices are well suited for high efficiency fast switching applications, low in-line power loss needed in small outline surface mount package.

■ PART NUMBER INFORMATION

SMC 3407G S - TR G

a	b	c	d	e
---	---	---	---	---

a : Company name.

b : Product Serial number.

c : Package code S: SOT-23L

d : Handling code TR: Tape&Reel

e : Green produce code G: *RoHS Compliant*

■ FEATURES

$V_{DS} = -30V$, $I_D = -4.3A$

$R_{DS(ON)} = 48m\Omega$ (Typ.)@ $V_{GS} = -10V$

$R_{DS(ON)} = 68m\Omega$ (Typ.)@ $V_{GS} = -4.5V$


◆Fast switch

■ APPLICATIONS

◆Portable Equipment

◆Power Management

◆Load Switch

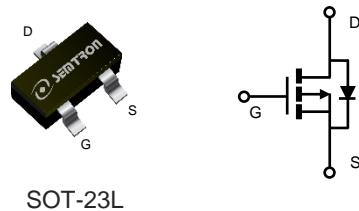

SOT-23L

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-Source Voltage	-30	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current	$T_A=25^\circ C$	-4.3
		$T_A=70^\circ C$	-3.5
I_{DM}	Pulsed Drain Current ^A	-17.2	A
P_D	Power Dissipation ^C	$T_A=25^\circ C$	1.6
		$T_A=70^\circ C$	1
T_J	Operation Junction Temperature	-55/150	$^\circ C$
T_{STG}	Storage Temperature Range	-55/150	$^\circ C$

■ THERMAL RESISTANCE

Symbol	Parameter	Typ	Max	Units
$R_{\theta JA}$	Thermal Resistance Junction to Ambient ^B	$t \leq 10s$	80	$^\circ C/W$
	Thermal Resistance Junction to Ambient ^{BD}	Steady-State	120	

ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ Unless otherwise noted)


Symbol	Parameter	Condition	Min	Typ	Max	Unit	
Static Parameters							
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-30			V	
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-1	-1.5	-2	V	
I_{GSS}	Gate Leakage Current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			± 100	nA	
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-30\text{V}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$			-1	μA	
		$V_{DS}=-24\text{V}, V_{GS}=0\text{V}, T_J=75^\circ\text{C}$			-10		
$R_{DS(\text{ON})}$	Drain-source On-Resistance	$V_{GS}=-10\text{V}, I_D=-4.3\text{A}$ $V_{GS}=-4.5\text{V}, I_D=-3.2\text{A}$		48 68	55 78	$\text{m}\Omega$	
G_f	Forward Transconductance	$V_{DS}=-10\text{V}, I_D=-3.7\text{A}$		6		S	
Diode Characteristics							
V_{SD}	Diode Forward Voltage	$I_S=-1\text{A}, V_{GS}=0\text{V}$		-0.7	-1	V	
I_S	Continuous Source Current				-2.1	A	
Dynamic and Switching Parameters							
$Q_g(10\text{V})$	Total Gate Charge	$V_{DS}=-15\text{V}, V_{GS}=-10\text{V}$ $I_D=-3.7\text{A}$		8.7	12.2	nC	
$Q_g(4.5\text{V})$	Total Gate Charge			5.9	8.3		
Q_{gs}	Gate-Source Charge			1.7	2.4		
Q_{gd}	Gate-Drain Charge			2.1	2.9		
C_{iss}	Input Capacitance	$V_{DS}=-15\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$		512		pF	
C_{oss}	Output Capacitance			48			
C_{rss}	Reverse Transfer Capacitance			31			
$t_{d(on)}$	Turn-On Time	$V_{DD}=-15\text{V}, V_{GEN}=-10\text{V},$ $R_G=3.3\Omega, I_D=-1\text{A}$		3.2	6	nS	
t_r				9.5	18		
$t_{d(off)}$	Turn-Off Time			16	30		
t_f				5.7	11		

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.


- A. Pulsed width limited by maximum junction temperature $T_J(\text{MAX})=150^\circ\text{C}$, initial temperature $T_J=25^\circ\text{C}$.
- B. Measure the value in a still air environment at $T_A=25^\circ\text{C}$ using an installation mounted on a 1 in2 FR-4 board.
- C. Current Rating based $t \leq 10$ sec thermal resistance rating
- D. The $R_{\theta JA}$ is the sum of the thermal resistance.

The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.


TYPICAL CHARACTERISTICS

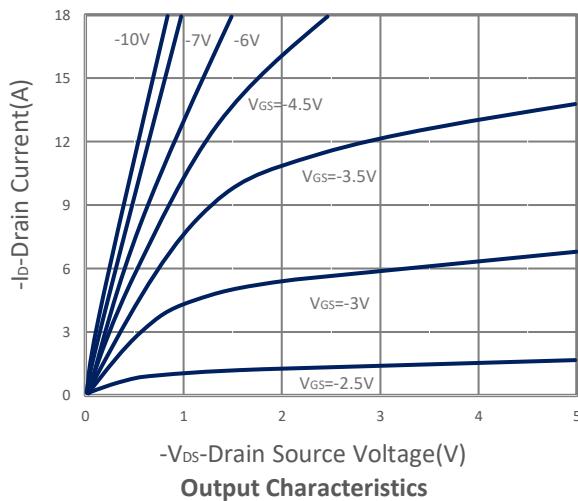


Output Characteristics

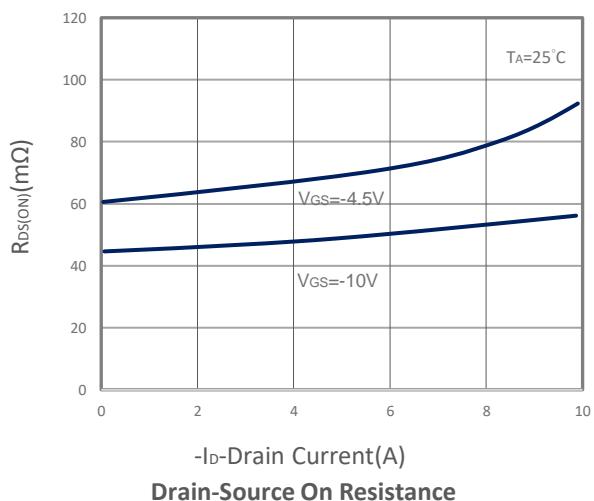


Drain-Source On Resistance

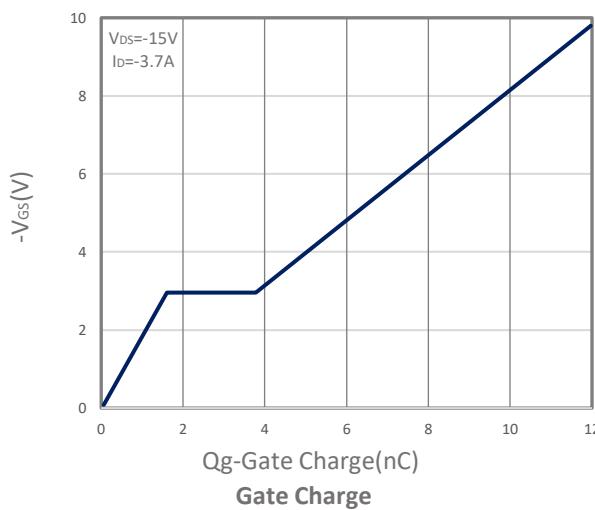


Gate Charge

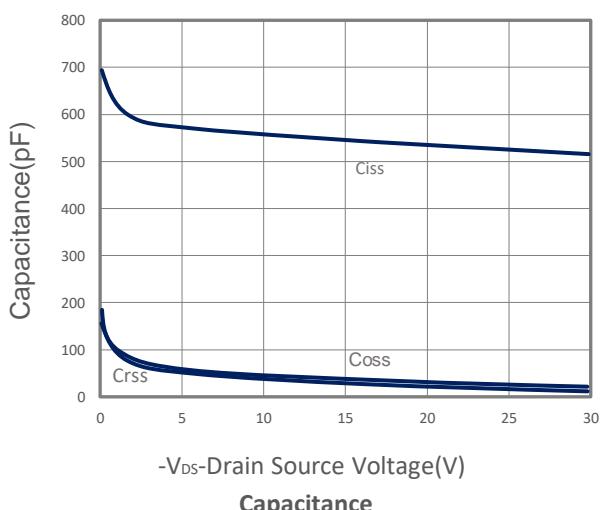

Capacitance






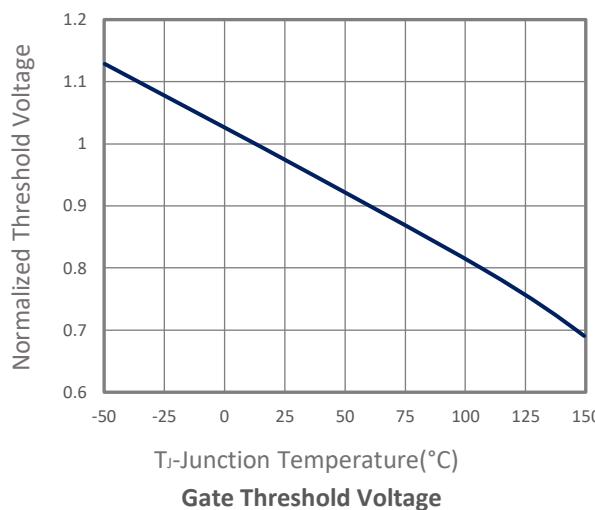


Gate Threshold Voltage

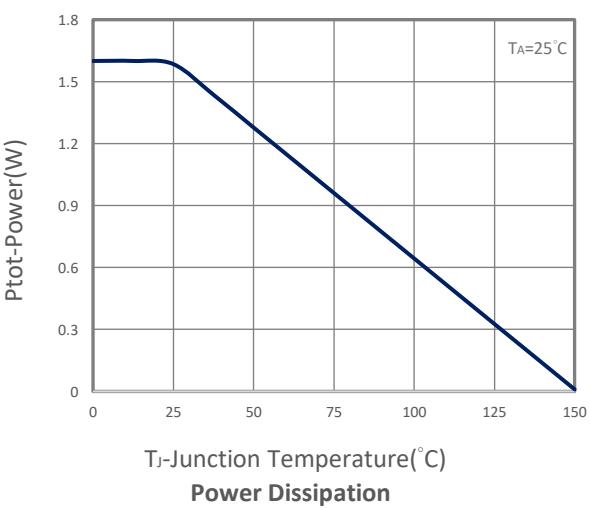


Power Dissipation


TYPICAL CHARACTERISTICS

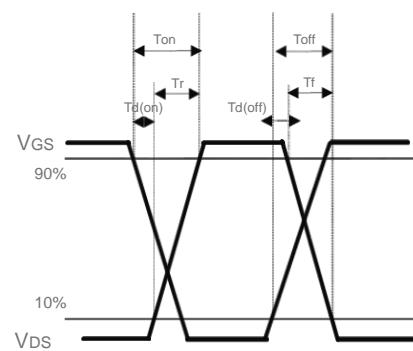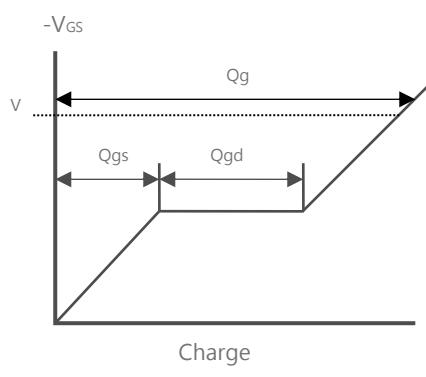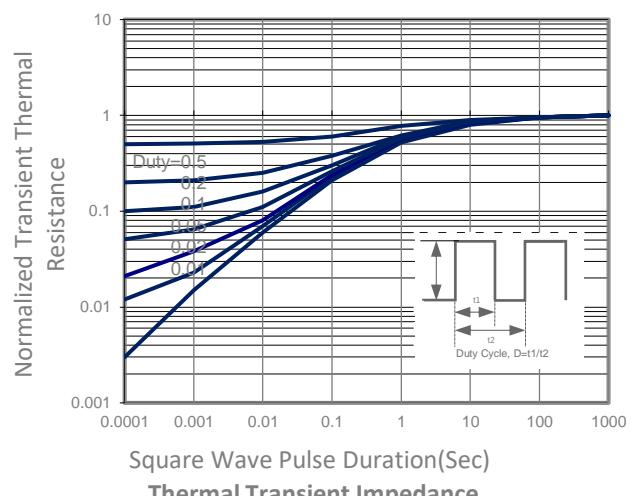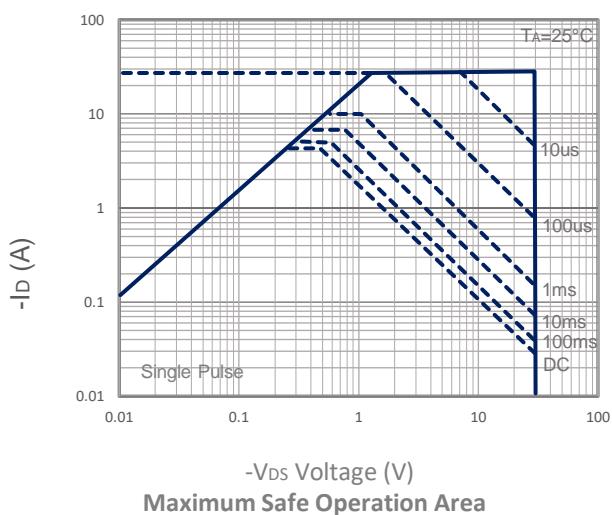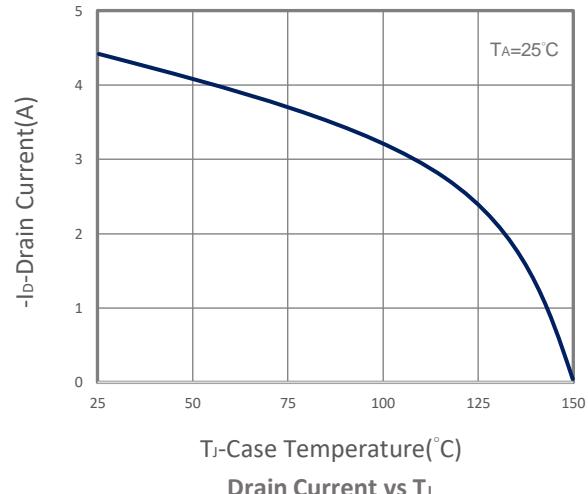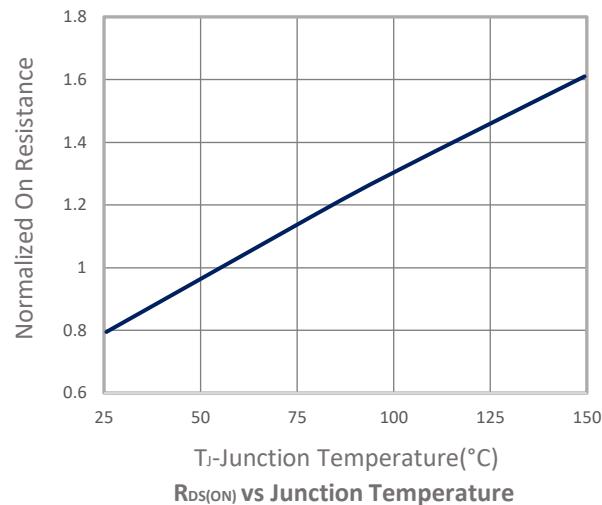

SOT-23L PACKAGE DIMENSIONS

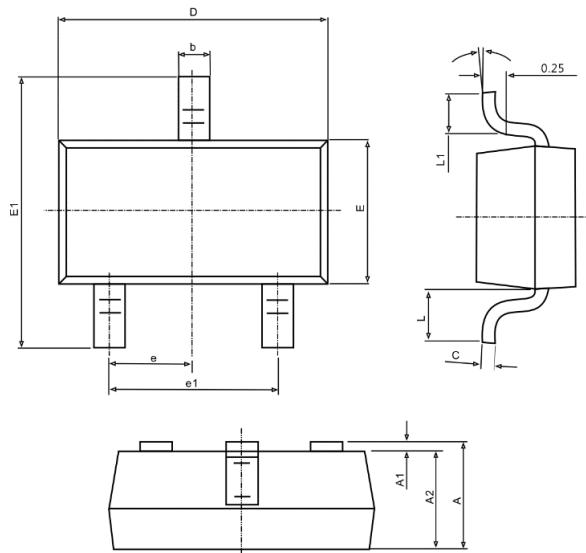

Recommended Minimum Pad(mm)

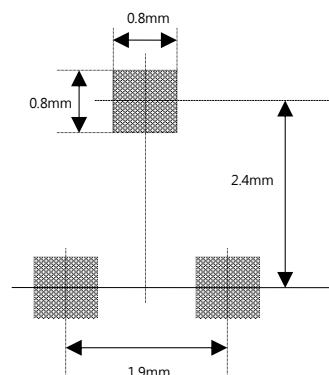

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.000	1.300	0.039	0.049
A1	0.000	0.100	0.000	0.004
A2	1.000	1.200	0.039	0.047
b	0.300	0.500	0.012	0.020
c	0.047	0.207	0.002	0.008
D	2.800	3.000	0.110	0.118
E	1.500	1.700	0.059	0.067
E1	2.600	3.000	0.102	0.118
e	0.950 TYP.		0.037 TYP.	
e1	1.900 TYP.		0.075 TYP.	
L1	0.250	0.550	0.010	0.022
θ	0°	8°	0°	8°